

Universal Input/Output (HART) LB7104A

- 4-channel
- Inputs Ex ia, Outputs Ex ia
- Analog input, digital input, analog output, digital output
- Mounting in Zone 2, Class I/Div.2 or in the safe area
- Supply circuit 15 V (20 mA)
- HART communication via field bus or service bus
- Simulation mode for service operations (forcing)
- Line fault detection (LFD): one LED per channel
- Permanently self-monitoring



Function


The device is a configurable universal module. Each channel can operate in the following modes:

- As an analog input (AI) it feeds 2-wire transmitters.
- As an analog output (AO) it can drive proportional valves, I/P converters, or local indicators.
- As a digital input (DI) it reads dry contacts.
- As a digital output (DO) it can drive solenoids, sounders, or LED.

A combination of analog and digital I/O is possible.

Channel LEDs indicate the status of each channel. White LEDs indicate whether AI, AO, DI, DO are selected. The intrinsically safe signals are galvanically isolated from the bus and the power supply.

Wiring Diagram

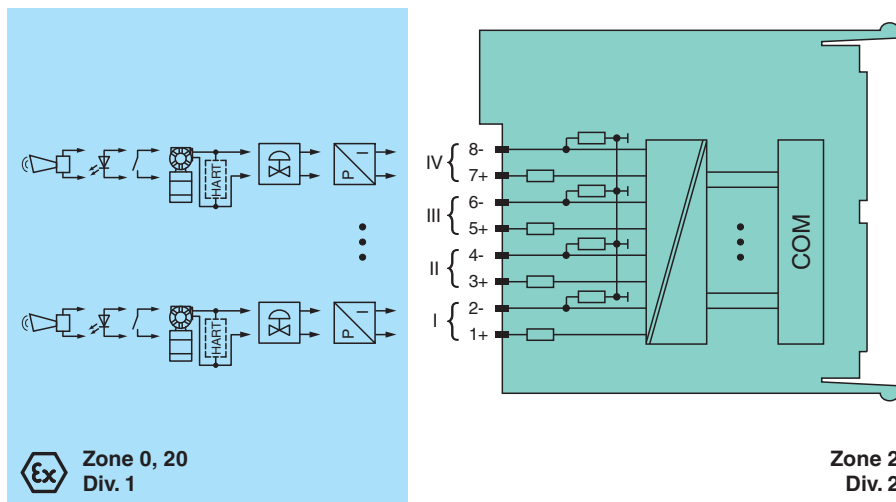

Technical Data

Slots		
Occupied slots	1	
Supply		
Connection	backplane bus	
Rated voltage	U _r	12 V DC , only in connection with the power supplies LB9***
Power dissipation	2 W	
Power consumption		3 W
Internal bus		
Connection		backplane bus

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Interface		manufacturer-specific bus to standard com unit
Analog input		
Number of channels		4
Suitable field devices		
Field device		pressure converter
Field device [2]		flow converter
Field device [3]		level converter
Field device [4]		Temperature Converter
Field device interface		
Connection		2-wire transmitter
Connection		terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-
Transmitter supply voltage		min. 15 V at 20 mA ; 21.5 V at 4 mA
Input resistance		15 Ω
Line fault detection		can be switched on/off for each channel via configuration tool , configurable via configuration tool
Short-circuit		factory setting: > 21 mA Can be parameterized in the range 0 ... 22 mA
Open-circuit		factory setting: < 3.6 mA Can be parameterized in the range 0 ... 22 mA
HART communication		yes
HART secondary variable		yes
Analog output		
Number of channels		4
Suitable field devices		
Field device		Proportional Valve
Field device [2]		I/P converters
Field device [3]		on-site display
Connection		terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-
Current		0 ... 20 mA short-circuit protected
Line fault detection		can be switched on/off for each channel via configuration tool , configurable via configuration tool
Short-circuit		factory setting: < 50 Ω configurable between 0 ... 26 mA
Open-circuit		deviation of preset output value > 0.5 mA
Load		max. 750 Ω at 20 mA
HART communication		yes
HART secondary variable		yes
Watchdog		output off 0.5 s after serious fault
Digital input		
Number of channels		4
Sensor interface		
Connection [2]		volt-free contact
Connection		terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-
Line fault detection		can be switched on/off for each channel via configuration tool
Connection		mechanical switch with additional resistors (see connection diagram)
Short-circuit		> 7 mA
Open-circuit		< 0.1 mA
Digital signals (active)		
Switching point: ON		> 2.1 mA
Switching point: OFF		< 1.2 mA
Digital output		
Number of channels		4
Suitable field devices		
Field device		Solenoid Valve
Field device [2]		audible alarm
Field device [3]		visual alarm
Connection		terminals 1+, 2-, 3+, 4-, 5+, 6-, 7+, 8-

Release date: 2025-05-23 Date of issue: 2025-05-23 Filename: 254847_eng.pdf

Technical Data

Drive capability		12 V / 22 mA
Internal resistor	R_i	385 Ω
Current limit	I_{max}	22 mA
Open loop voltage	U_s	min. 22.7 V
Line fault detection		can be switched on/off for each channel via configuration tool
Test current		0.4 mA
Short-circuit		< 50 Ω
Open-circuit		< 0.2 mA
Transfer characteristics		
Deviation		
After calibration		0.1 % of the signal range at 20 °C (68 °F)
Influence of ambient temperature		0.1 %/10 K of the signal range
Refresh time		approx. 100 ms (4 channels)
Indicators/settings		
LED indication		Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1-4) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1) Configuration LED (AI, AO, DI, DO) white: selected channel mode
Coding		optional mechanical coding via front socket
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Conformity		
Electromagnetic compatibility		NE 21:2007
Degree of protection		IEC 60529:2000
Environmental test		EN 60068-2-14:2009
Shock resistance		EN 60068-2-27:2009
Vibration resistance		EN 60068-2-6:2008
Damaging gas		EN 60068-2-42:2003
Relative humidity		EN 60068-2-78:2001
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		95 % non-condensing
Altitude		max. 2000 m
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Degree of protection		IP20 when mounted on backplane
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)
Mass		approx. 100 g
Dimensions		16 x 100 x 102 mm (0.63 x 3.9 x 4 inch)
Height		100 mm
Width		16 mm
Length		103 mm
Data for application in connection with hazardous areas		
EU-type examination certificate		BVS 11 ATEX E 116 X

Release date: 2025-05-23 Date of issue: 2025-05-23 Filename: 254847_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Technical Data

Marking		Ⓢ II 3(1) G Ex nA [ia Ga] IIC T4 Gc Ⓢ I (M1) [Ex ia Ma] I Ⓢ II (1) D [Ex ia Da] IIIC
Input		
Voltage	U _o	27 V
Current	I _o	87 mA
Power	P _o	575 mW (linear characteristic)
Output		
Voltage	U _o	27 V
Current	I _o	87 mA
Power	P _o	575 mW (linear characteristic)
Galvanic isolation		
Rated voltage	U _m	250 V field circuits to control and supply circuits
Input/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Output/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 EN 60079-11:2012 EN 60079-15:2010
International approvals		
ATEX approval		BVS 11 ATEX E 116X
UL approval		E106378
IECEx approval		
IECEx certificate		IECEx BVS 11.0068X
IECEx marking		Ex nA [ia Ga] IIC T4 Gc [Ex ia Da] IIIC [Ex ia Ma] I
General information		
System information		The module has to be mounted in appropriate backplanes (LB9***) in Zone 2 or outside hazardous areas. Here, observe the corresponding declaration of conformity. For use in hazardous areas (e. g. Zone 2, Zone 22 or Div. 2) the module must be installed in an appropriate enclosure.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

