

Getac recommends Windows 11 Pro for business




# V110 FULLY RUGGED LAPTOP

- 12th Generation Intel<sup>®</sup> Core<sup>™</sup> i7 / i5 vPro<sup>®</sup> Processor
- 11.6" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with Intel<sup>®</sup> vPro<sup>®</sup>, Windows disk encryption, TPM 2.0 and many more multi-factor authentication options
- Versatile I/Os connectivity including Thunderbolt<sup>™</sup> 4 and docking solutions
- LifeSupport battery swappable technology





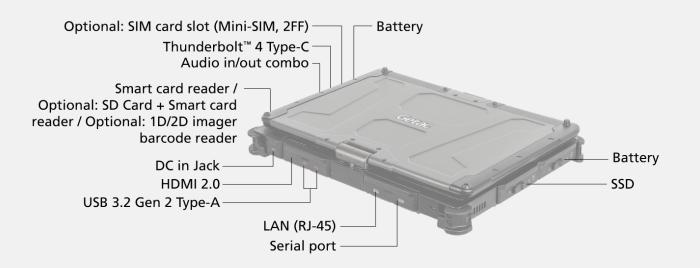

### **SPECIFICATIONS**

#### Generation

G7

**Operating System** Windows 11 Pro

Mobile Computing Platform Intel<sup>®</sup> Core™ i5-1235U Processor Max. 4.4GHz with Intel<sup>®</sup> Turbo Boost Technology - 12MB Intel<sup>®</sup> Smart Cache

Platform options: Intel<sup>®</sup> Core<sup>™</sup> i5-1245U vPro<sup>®</sup> Processor Max, 4.46Hz with Intel<sup>®</sup> Turbo Boost Technology - 12MB Intel<sup>®</sup> Smart Cache

Intel<sup>®</sup> Core™ i7-1255U Processor Max. 4.7GHz with Intel<sup>®</sup> Turbo Boost Technology - 12MB Intel<sup>®</sup> Smart Cache

Intel<sup>®</sup> Core™ i7-1265U vPro<sup>®</sup> Processor Max. 4.8GHz with Intel<sup>®</sup> Turbo Boost Technology - 12MB Intel<sup>®</sup> Smart Cache

#### VGA Controller

Intel<sup>®</sup> Iris<sup>®</sup> X<sup>e</sup> Graphics Display

11.6° Wide Viewing Angle TFT LCD FHD (1920 x 1080) Protection film 1,000 nits LumiBond display with Getac sunlight readable technology Capacitive multi-touch screen Storage & Memory

8GB DDR4 Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard LED backlit membrane keyboard Optional: Rubber keyboard Power button 5 tablet programmable buttons

#### **Pointing Device**

- Capacitive multi-touch screen - Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer) Touchpad Glide touchpad with left-click and right-click buttons

#### **Expansion Slot**

Smart card reader " Optional: SD Card + Smart card reader " Optional: 1D/2D imager barcode reader "

#### I/O Interface

I/O Interface 5M webcam x 1 <sup>III</sup> Audio in/out combo x 1 DC in Jack x 1 Thunderbolt<sup>III</sup> 4 Type-C x 1 USB 3.2 Gen 2 Type-A x 2 LAN (R145) x 1 Bocking connector x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) <sup>IV</sup> Optional: SIM card slot x 1 (Mini-SIM, 2FF) <sup>IV</sup> Optional: Windows Hello face-authentication FHD camera (front-facing) x 1<sup>III</sup> Optional: RF antenna pass-through for GPS, WWAN and WLAN Optional: M pixels auto focus rear camera x 1 Communication Interface

#### **Communication Interface**

10/100/1000 base-T Ethernet Intel<sup>®</sup> Wi-Fi 6E AX211, 802.11ax Bluetooth (v5.3) <sup>V</sup> Optional: Dedicated GPS <sup>vii</sup> Optional: AG LTE mobile broadband <sup>vi, iv, xvi</sup> Optional: SG Sub-6<sup>®</sup>, <sup>viv, xvi</sup> Dual SIM (Mini-SIM 2FF and e-SIM) <sup>vi</sup>

#### **Security Feature**

**TPM 2.0** TPM 2.0 Kensington lock Optional: Intel<sup>®</sup> vPro<sup>®</sup> Technology Optional: Fingerprint reader Optional: HF RFID reader<sup>vii</sup> Smart card reader Optional: Windows Hello face-authentication FHD camera (front-facing)<sup>iii</sup>

#### Power

AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2 LifeSupport battery swappable technology

### Dimension (W x D x H) & Weigh 313 x 238 x 39mm (12.32" x 9.37" x 1.53") 2.1kg (4.63lbs) <sup>viii</sup>

Rugged Feature

MIL-STD-810H certified IP65 certified MIL-STD-461G certified <sup>1</sup>\* Vibration & Amp; 4ft (1.2m) drop resistant <sup>\*</sup> Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) <sup>xi</sup> Optional: Salt fog certified

#### **Environmental Specification**

Temperature <sup>xii</sup>. - Operating: -29°C to 63°C / -20°F to 145°F - Storage: -51°C to 71°C / -60°F to 160°F Jumidter Humidity: - 95% RH, non-condensing

### Pre-installed Software

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager <sup>xiii</sup> Optional: Absolute Persistence<sup>®</sup>

#### **Optional software**

Getac Driving Safety Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility <sup>xv</sup>

#### Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh) AC adapter (65W, 100-240VAC) Capacitive stylus with tether

#### **Optional:**

Optional: Carry bag Battery (11.1V, typical 2100mAh; min. 2040mAh) Multi-Bay charger (Dual-Bay) Multi-Bay charger (Eight-Bay) AC adapter (65W, 100-240VAC) Office dock AC adapter (90W, 100-240VAC) DC-DC vehicle adapter (90W, 100-240VAC) DC-DC vehicle adapter (120W, 11-32VDC) Digitizer pen with tether Capacitive stylus with tether Protection film Hard handle X strap Hard handle X strap Shoulder strap (2-point) Vehicle dock <sup>xv</sup> Office dock <sup>xv</sup> DS100 USB-C docking station Spare SSD kit 100W Type-C adapter Getac rugged keyboard

## **V110 FULLY RUGGED LAPTOP**

#### Bumper-to-Bumper warranty

**burnper-to-bumper warranty** Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard 3 years Bumper-to-Bumper

- I.
- Units equipped with dual channel memory come with Intel<sup>®</sup> Iris<sup>®</sup> X<sup>e</sup> Graphics. Smart card reader, Optional SD card + Smart card reader, and Optional 1D/2D imager barcode reader are mutually exclusive. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options II.
- III. mutually exclusive options.
- Units with 4G/5G LTE option come with an embedded SIM card slot. IV.
- SIM card slot. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers. V
- VI. providers.
- 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). Weight and dimensions vary from configurations and VII.
- VIII. optional accessories.
- IX. MIL-STD-461 90W AC adapter sold separately. Х.
- Drop test results vary from configurations and optional accessories. XI.
- Available with limited configurations and environment conditions. XII.
- Tested by an independent third-party test lab following MIL-STD-810H. XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVI. Support GLONASS, Galileo, and BeiDou. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	1	1
LAN	4	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	





Getac LISA

15495 Sand Canyon Ave. Suite 350 Irvine, CA 92618 Tel : 949-681-2900 GetacSales\_US@getac.com | www.getac.com/us/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only,available specification shall be subjected to quotation by request.