

EPF-HPSM-36-1.5HP-3P

36" Explosion Proof Fan - 17620 CFM - 1-1/2 HP - 230-460V 3P - Class 1 Group D & Class 2 Groups F & G

Product ID: 146365

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPF-HPSM-36-1.5HP-3P Explosion Proof High Volume Ventilation Fan

Type: High Pressure High Volume Ventilation Fan
Propeller Dimensions: 36" Diameter
Propeller Material: Spark-Resistant Cast Aluminum
Weight: 203 lbs
Voltage: Multi-Voltage - 230-460V AC 3 Phase
Motor: 1.5 HP Fully Enclosed Explosion Proof
Rotations Per Minutes (RPM): 1150
Peak CFM (@ 0" SP): 17620
Max Sounds Levels @ 5': 37.1 (sones), 80.45 (db)
Wiring: Hard-Wire
Mounting: Permanent Mount

Ratings/Features:

Listed for United States
Class I, Divisions 1 & 2, Group D
Class II, Divisions 1 & 2, Groups F & G
Spark-Resistant Propeller
Up To 17620 CFM Air Movement
Rated for Hazardous Environments
Made in the USA

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Made in the USA

The EPF-HPSM-36-1.5HP-3P from Larson Electronics is a high pressure, high volume explosion proof ventilation fan that operates on 230-460V AC voltage. This high volume explosion proof ventilation fan features a 36" diameter spark resistant cast aluminum blade that moves air at a rate of up to 17620 cubic feet per minute (CFM) for superior ventilation and air movement. The EPF-HPSM-36-1.5HP-3P is powered by a fully enclosed

and explosion proof 1.5 horsepower motor.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO THIS PRODUCT

The EPF-HPSM-36-1.5HP-3P explosion proof fan is rated for Class I Group D and Class II Groups F & G hazardous environments. The 36" diameter propeller on this explosion proof high pressure ventilation fan is constructed from cast aluminum to resist sparking further increasing the safety of the hazardous environment in which the fan is being utilized. This three phase explosion proof ventilation fan has a 1.5 horsepower fully enclosed motor that can spin the propeller at a rate of 1150 RPM.

Voltage: The EPF-HPSM-36-1.5HP-3P explosion proof ventilation fan is multi-voltage capable and can operate on voltages ranging from 230-460V AC.

Wiring: The EPF-HPSM-36-1.5HP-3P is a hard-wired ventilation fan that should be installed according to national, state and local electrical and mechanical codes.

Applications: Class I Group D and Class II Groups F & G hazardous areas that require ventilation including but not limited to the following: clean rooms, marijuana extraction rooms, laboratory hoods, oil refineries, grain mills, chemical plants, welding shops, chemical storage areas and battery changing areas. At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.


Made in USA Quality

1. Fully enclosed explosion proof 1.5 HP motor.
2. Spark-resistant cast aluminum 36" diameter propeller.
3. Class I Group D and Class II Groups F & G rated.
4. Multi-voltage capable.
5. Moves up to 17620 cubic feet of air per minute.
6. Fully assembled and ready to install

CFM Static Pressure (SP) Ratings

- 0" SP - 17620 CFM
2. 1/8" SP - 16500 CFM
3. 1/4" SP - 15200 CFM
4. 3/8" SP - 13620 CFM
5. 1/2" SP - 12300 CFM

Frequently Asked Questions (FAQ)

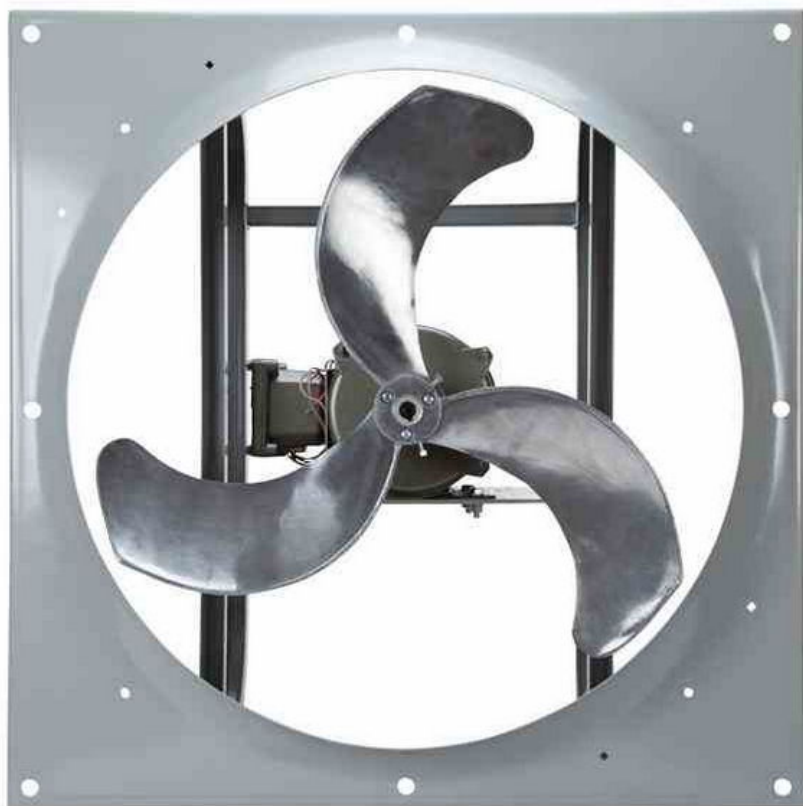







EPF-HPSM-36-1.5HP-3P

Product ID: 146365

Warranty: 12 Months

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Certificate 2, Misc](#)
- [Certificate 3, Misc](#)
- [Dimensional Drawing 2D](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [SpecSheetRussian](#)
- [SpecSheetSpanish](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [Wiring Diagram \(Online\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)