

# Pulsarlube E

## Compact & Economical

The Pulsarlube E features compact size which can easily be installed in confined areas with limited accessibility. This eco-friendly product is recyclable.

### Features & Benefits



Compact design is convenient for use in very confined spaces & Specially designed to endure high vibration



Eco-friendly product where applicable parts can be disposed of separately



CE, ATEX, UL certified for intrinsically safe use in hazardous locations



High IP rating protects against ingress of dust and water and allows underwater installation



### Specifications

**Grease Pouch Capacity**

60ml/120ml/240ml (disposable)

**Operating Method**

Electrochemical reaction (Nitrogen gas)

**Operating Pressure**

Max. 5bar (73psi)

**Operating Temperature**

-20°C~55°C (-4°F~131°F)

**Dispensing Periods**

1, 3, 6, 9, 12 month

**Single Point Remote Installation**

Max. 1m (3.3ft) with O.D. Ø8 tube

**Multi-Point Installation**

N/A


**IP Code**

IP68

**Product Certifications**

ATEX, UL, IECEx, KCs, CE, MSHA

### Overview

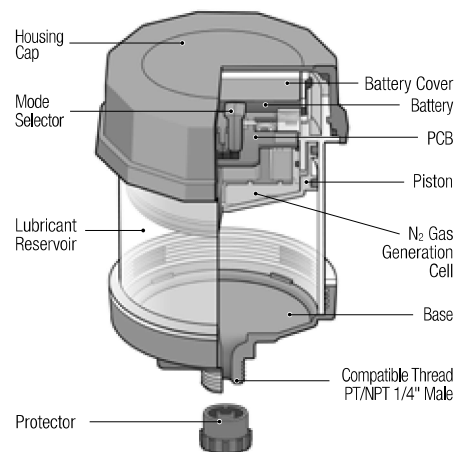

**Product Dimension**

E60 : Ø77(3.03") x 91mm (3.58") (H)  
 E120 : Ø77(3.03") x 111mm (4.37") (H)  
 E240 : Ø77(3.03") x 156mm (6.14") (H)

### Applications



The Pulsarlube V is **intrinsically safe** and can be used in **hazardous locations** containing flammable liquids, vapors, gasses, and dust.

    **IECEX IP68**  

