

Pulsarlube EXP/EXPL

Globally Certified for Use in Hazardous Areas

The Pulsarlube EXP/EXPL is specifically designed and certified for protection against explosive gases or dust existing in hazardous locations.

Features & Benefits



Easy to check LCD display with backlight function



Reliable lubricator certified for safe use in hazardous areas



High operating pressure allows superior performance in its class



Substantial savings with the use of replaceable grease pouches and battery packs



* For replacement kit information, please refer to Service Pack on Page 15.

Specifications

Grease Pouch Capacity

60ml/120ml/240ml/480ml (pre-set)

Power Supply

DC 4.5V Battery Pack (replaceable)
Standard : Alkaline Battery
Optional : Lithium Battery

Operating Pressure

30~60bar (435~870psi)

Operating Temperature

EXP : 0°C~50°C
EXPL : -15°C~50°C

Dispensing Periods

60ml : 1~12 month
120ml~480ml :
1, 2, 3, 6, 9, 12 month

Single Point Remote Installation

Lithium Battery :
Max. 6m (20ft) with O.D. Ø6 tube

Multi-Point Installation

Lithium Battery : Max. 3m (10ft)
with O.D. Ø6 tube (Up to 8 lube points)


IP Code

IP65

Product Certifications

EXP : ATEX, IECEx, KCs, CE, NEPSI, TS
EXPL : ATEX, ETL, IECEx, KCs, CE, NEPSI, TS

Overview

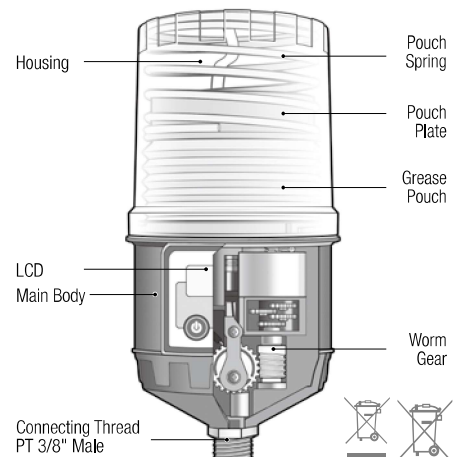

Applications



PETROCHEMICAL PLANTS NUCLEAR POWER PLANTS OIL & GAS THERMAL POWER PLANTS ELECTRIC MOTORS

Product Dimension

EXP/EXPL60, EXP/EXPL120 : Ø91(3.60") x 181mm(7.13") (H)
EXP/EXPL240 : Ø91(3.60") x 208mm(8.19") (H)
EXP/EXPL480 : Ø92(3.62") x 260mm(10.23") (H)