

Pulsarlube V

Advanced Performance & Smart Operation

The Pulsarlube V is an easy-to-program gas type lubricator which offers a large user-friendly LCD display.

Features & Benefits



Variable dispensing settings with a large informative LCD display & Easy to reprogram at any time with a press of a button



8-bit microprocessor controlled to ensure the most accurate dispensing rate



CE, ATEX, UL certified for intrinsically safe use in hazardous locations



High IP rating protects against ingress of dust and water and allows underwater installation



Specifications

Grease Pouch Capacity

125ml/250ml (disposable)

Operating Method

Electrochemical reaction
(Nitrogen gas)

Operating Pressure

Max. 5bar (73psi)

Operating Temperature

-20°C~55°C (-4°F~131°F)

Dispensing Periods

1, 2, 3, 6, 12 month & Purge (P)

Single Point Remote Installation

Max. 1m (3.3ft) with O.D. Ø8 tube

Multi-Point Installation

N/A


IP Code

IP68

Product Certifications

ATEX, UL, IECEx, KCs, CE, MSHA

Overview

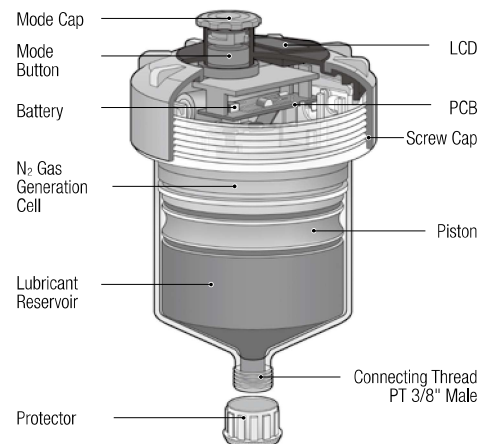

Product Dimension

V125 : Ø97(3.81") x 128mm(5.04") (H)

V250 : Ø97(3.81") x 166mm(6.53") (H)

Applications



PULP & PAPER



STEEL MILLS



CEMENT



BLOWERS



ELECTRIC MOTORS