

Explosion Protection

Marking ATEX

II2 G Ex db op is IIB T5/T6 Gb

II2 D Ex op is tb IIIC T80/90C Db IP66

Marking IECEX

Ex db op is IIB T5/T6 Gb

Ex op is tb IIIC T80/90C Db IP66

Marking UL844 (North American)

Class I, Division 1, Groups C, D

Class I, Division 2, Groups A, B, C, D

Class II, Division 1, Groups E, F, G

Class II, Division 2, Groups F, G

Class III

Marine Marking


UL 1598, UL1598A

ABS

Other Rating

IP 66

IK 10

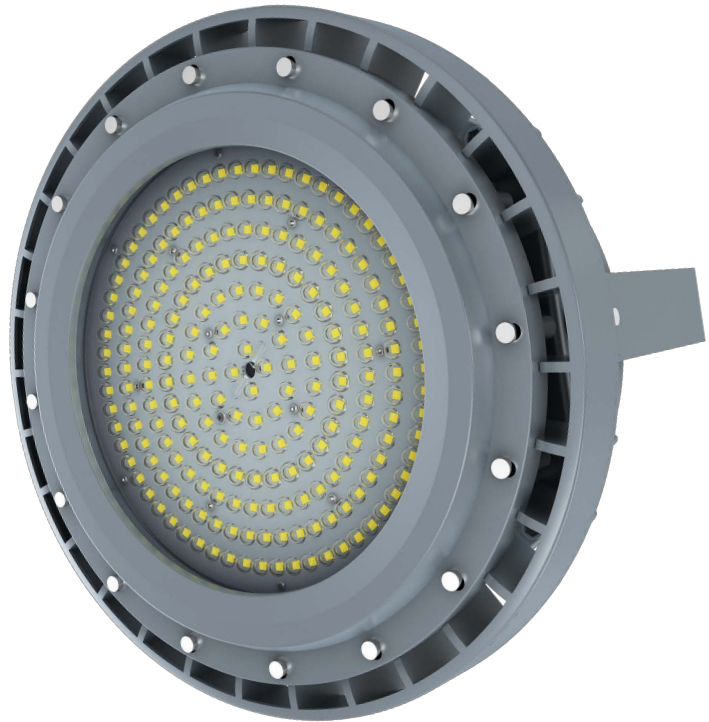

Materials

- Housing: Aluminum
- Lens: Tempered glass
- Hardware: stainless steel
- Mounting Bracket: stainless steel

Specification

Model	Wattage	Color Temperature	Voltage	Lumens	Warranty	CRI
EX-20W C2YZDA	20W	2200K-7000K	AC100-277V Or AC200-480V Or DC12-48V	2800	5 years	80
EX-60W C2YZDA	60W			8400		
EX-80W C2YZDA	80W			11200		
EX-100W CYZDA	100W			14000		
EX-150W CYZDA	150W			21000		
EX-200W C3YZDA	200W			28000		
EX-250W C3YZDA	250W			35000		
EX-280W C3YZDA	280W			39200		

"C,C2,C3"=Product code,"Y"=D or N:Dimmable or non-dimmable "Z"=CCT,from 2200-7000K

"D"=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°

A for glass info. blank for flat glass, C for spherical glass.

Packing Information

Model	Quantity/Carton	Length(cm)	Width(cm)	Height(cm)	Net weight(kg)	Gross weight(kg)
C	1	55	52	36	17.4	19
C2	1	47	47	34.5	14	16
C3	1	55.5	55.5	34.5	21	25