


DORCY®



PROFESSIONAL LIGHTING

CUL Class Intrinsically Safe

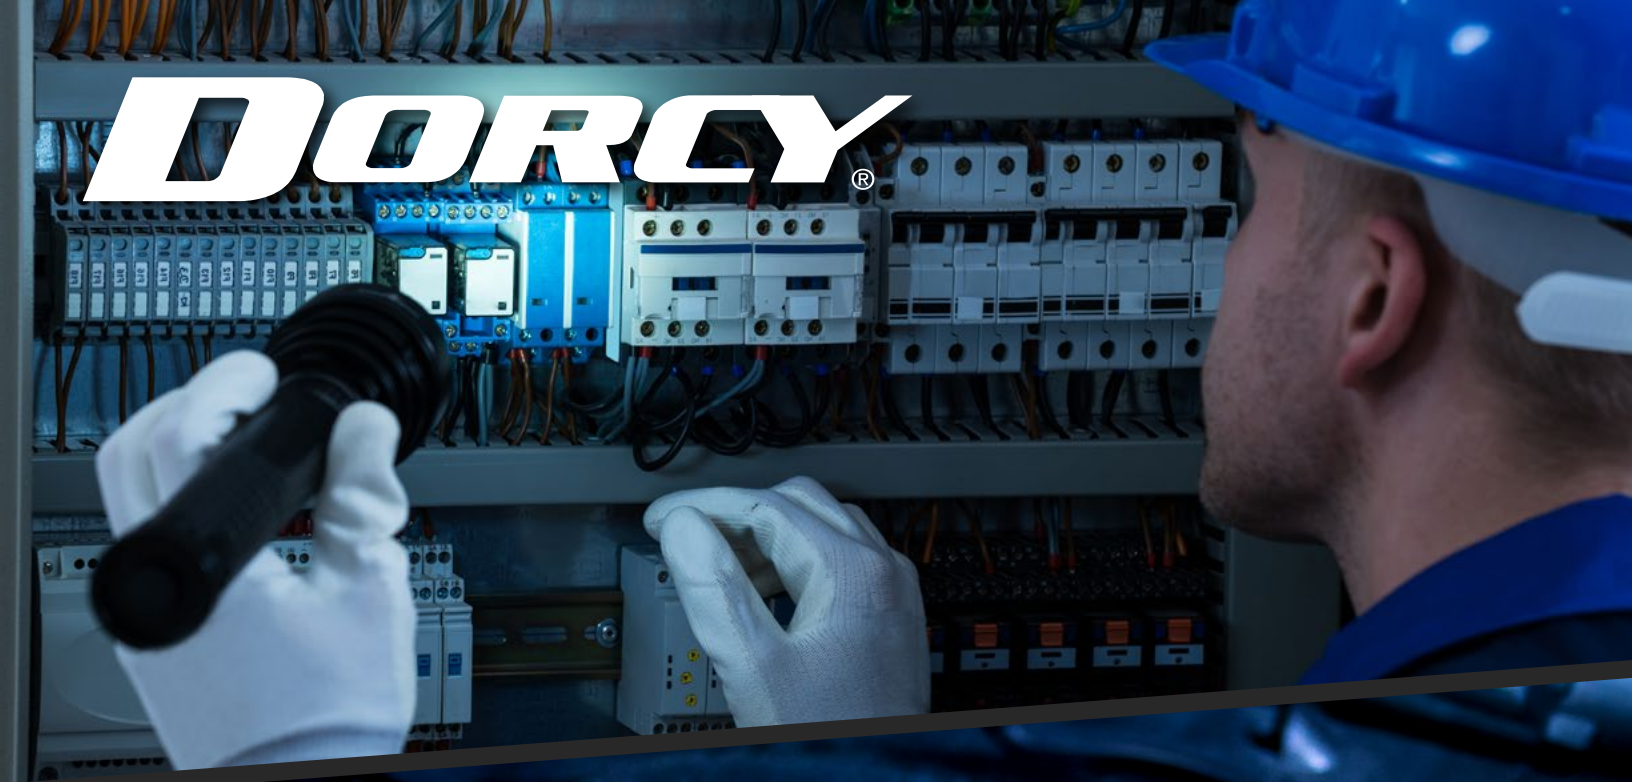

41-0091 Intrinsically Safe Flashlight

Lumens: 157
Run Time: 9 Hrs
Beam Distance: 130
Water Resistant IP68
Batteries: 4 AA (Not Included)
Features: Screw Fastener for Safety, High - Low - Flashing Modes, Non Slip Grip.



41-0092 Intrinsically Safe Flashlight

Lumens: 124
Run Time: 52 Hrs
Beam Distance: 140 Meters
Water Resistant IP67
Batteries: 3 C (Not Included)
Features: High - Low - Flashing, Mounting Bracket, Clip.



41-0093 Intrinsically Safe Flashlight

Lumens: 65
Run Time: 14 Hrs
Beam Distance: 130 Meters
Water Resistant IP67
Batteries: 4 AA (Not Included)
Features: High - Low - Flashing, Carrying Lanyard, Lightweight.



41-0094 Intrinsically Safe Headlight
















Lumens: 180
Run Time: 2 Hrs 30 Min
Beam Distance: 100 Meters
Water Resistant IP67
Batteries: 3 AAA (Not Included)
Features: High and Low Settings, Headlight Pivots for Different Angles.



41-0095 Intrinsically Safe Flashlight

Lumens: 190
Run Time: 9 Hrs 45 Min
Beam Distance: 230 Meters
Weather Resistant
Batteries: 4 AA (Not Included)
Features: High and Low Settings, Right Angle Design with Convenient Pocket Clip.



Features	Certifications	Standards
41-0091 <ul style="list-style-type: none"> - High, Low and flash mode functions - Uses high power CREE LED - IP67 - Double O-ring - Tough durable casing - High impact lens - Non-slip handle - High-visibility yellow - Screw fastener for safety precautions 	 UL USA: UL File No: OERX.E324236 Class I Div 1&2 Grp ABCD/Class II Div 1&2 Grp EFG Class III/Temperature Code 4  Ex Europe: ATEX Certificate No. DEMKO 13 ATEX 1205039X II 1G Ex ia IIC T4 IECEX IECEX Worldwide: IECEX Certificate No: IECEX UL13.0060X EX ia IIC T4 Ga  0518	1. UL 913, Seventh Edition 2. CSA C22.2 No. 157-92. Reaffirmed 2013 3. EN 60079-0 : 2009 Edition 4. EN 60079-11 : 2012 Edition 5. EN 60079-26 : 2007 Edition 6. IEC 60079-0 : Fifth Edition 7. IEC 60079-11 : Sixth Edition 8. IEC 60079-26 : Second Edition
41-0092 <ul style="list-style-type: none"> - High, Low mode functions - Uses high power CREE LED - Two way position clip - Tough durable casing - High impact lens - Non-slip handle - High-visibility yellow - Screw fastener for safety precautions 	 Class I Div 1&2 Grp ABCD/Class II Div 1&2 Grp EFG Class III/Temperature Code T4  II 1G Ex ia IIC T4 IECEX EX ia IIC T4 Ga  0539	1. UL 913, 2011 2. UL783, 2011 3. CSA C22.2 No. 157, Reaffirmed 2012 4. EN 60079-0 : 2012/A11:2013 5. EN 60079-11 : 2012 6. EN 60079-26 : 2015 7. IEC 60079-0 : 02011 8. IEC 60079-11 : 2011 9. IEC 60079-26 : 2014
41-0093 <ul style="list-style-type: none"> - Aluminum heat sink - Designed reflector for long range lighting - Two way position clip - Tough durable casing - High impact lens - Non-slip handle - High-visibility yellow - Screw fastener for safety precautions - Water resistant 	 Class I Div 1&2 Grp ABCD/Class II Div 1&2 Grp EFG Class III/Temperature Code T4  II 1G Ex ia IIC T4 IECEX EX ia IIC T4 Ga DEMKO 11 ATEX 1110052X  0518	1. UL 913, 2011 2. UL783, 2011 3. CSA C22.2 No. 157, Reaffirmed 2012 4. EN 60079-0 : 2012/A11:2013 5. EN 60079-11 : 2012 6. EN 60079-26 : 2015 7. IEC 60079-0 : 02011 8. IEC 60079-11 : 2011 9. IEC 60079-26 : 2014
41-0094 <ul style="list-style-type: none"> - High and Low mode functions - Uses high power CREE LED - Focus and flood reflector - Submersible in water - Tough durable casing - Screw fastener for safety precautions - Built-in gas release vent 	 Class I Div 1&2 Grp ABCD/Class II Div 1&2 Grp EFG Class III/Temperature Code T4 IP67 File number: E324236  II 1G Ex ia IIC T4 IP67 DEMKO 14 ATEX 1354X IECEX EX ia IIC T4 Ga IP67 IECEX UL 14.0059X  0518	1. UL 913, Seventh Edition 2. CSA C22.2 No. 157-92. Reaffirmed 2012 3. EN 60079-0 : 2009 Edition 4. EN 60079-11 : 2012 Edition 5. EN 60079-26 : 2007 Edition 6. IEC 60079-0 : Fifth Edition 7. IEC 60079-11 : Sixth Edition 8. IEC 60079-26 : Second Edition
41-0095 <ul style="list-style-type: none"> - Angle head for use in chest pocket - High and Low mode functions - Uses high power CREE LED - Submersible in water - Tough durable casing - High efficient heatsink - Screw fastener for safety precautions - Built-in gas release vent 	 Class I Div 1&2 Grp ABCD/ Class II Div 1&2 Grp EFG Class III/Temperature Code T4 IP54 File number: 261379  Gas: II 1G Ex ia IIC T4 Ga Mine: I M1 Ex ia I Ma Sira 15ATEX2166X IECEX Gas: EX ia IIC T4 Ga Mine: Ex ia i Ma IECEX SIR 15.0062X  0518	1. UL 913, 2011 2. UL783, 2011 3. CSA C22.2 No. 157, Reaffirmed 2012 4. EN 60079-0 : 2012/A11:2013 5. EN 60079-11 : 2012 6. EN 60079-26 : 2015 7. IEC 60079-0 : 02011 8. IEC 60079-11 : 2011 9. IEC 60079-26 : 2014



41-4333 ULTRA HD 3 AAA

Lumens: 220 High
Run Time: 3 Hrs 45 Min
Beam Distance: 156 Meters High
Drop Test: 1 Meter
Weather Resistant
Batteries: 3 AAA (Included)
Features: Aircraft Grade Aluminum, Hi/Low/Strobe, TrueSpot® Reflector.



41-4331 ULTRA HD 4 AA

Lumens: 425 High
Run Time: 1 Hr 15 Min
Beam Distance: 328 Meters
Drop Test: 1 Meter
Weather Resistant
Batteries: 4 AA (Included)
Features: Aircraft Grade Aluminum, Hi/Low/Strobe, TrueSpot® Reflector.



41-4347 ULTRA HD Flashlight with Area Light 3 AAA

Lumens: 360 High / 30 Low
Run Time: 3 Hrs 30 Min High / 15 Hours Low
Beam Distance: 190 Meters High
Drop Test: 1 Meter
Weather Resistant
Batteries: 3 AAA (Included)
Features: Aircraft Grade Aluminum, Twist COB Area Light, Spot Beam.



41-4348 ULTRA HD Flashlight with Area Light 6 AA

Lumens: 650 High / 60 Low
Run Time: 11 Hrs 45 Min High / 50 Hrs Low
Beam Distance: 324 Meters High
Drop Test: 1 Meter
Weather Resistant
Batteries: 6 AA (Included)
Features: Aircraft Grade Aluminum, Twist COB Area Light, Spot Beam.



41-4350 ULTRA HD Fold-able Work light

Lumens: 500 High
Run Time: 2 Hrs 15 Min
Drop Test: 1 Meter
Weather Resistant
Batteries: 3 AAA (Included)
Features: Aircraft Grade Aluminum, 360 Degree Twist Area Light, Magnetic Base, Built in Tip Flashlight Spot and Flood Mode Operated Together or Separately.



41-4349 ULTRA HD COB Swivel Flashlight

Lumens: 320 High
Run Time: 5 Hrs 30 Min
Beam Distance: 116 Meters High
Drop Test: 1 Meter
Weather Resistant
Batteries: 3 AAA (Included)
Features: Aircraft Grade Aluminum, TrueSpot® Reflector, Swivel Head, COB, Removable Metal Belt / Vest Clip



41-4356 ULTRA HD Rechargeable Spotlight + Power Bank

Lumens: 1300 High / 500 Med / 200 Low / 850 Flood
Run Time: 6 Hrs High / 12 Hrs Med / 14 Hrs Low / 8 Hrs Flood
Beam Distance: 440 Meters High
Drop Test: 1 Meter
Weather Resistant
Battery: 4400mAh Lithium-ion Rechargeable (Built-In)
Features: C.O.B. LED, USB In/Out, Power Bank for Device Charging, Spot to Flood Beam, Rubber Grip, Trigger Lock, Quick Select Mode Button and Fold-Out Stand.



41-4336 ULTRA HD Rechargeable Utility Light + Power Bank

Lumens: 1500 High / 280 Low
Run Time: 7 Hrs High / 20 Hrs Low
Beam Distance: 62 Meters High
Drop Test: 1 Meter
Weather Resistant
Battery: 18650 4400mAh(3.7V) Lithium-ion Rechargeable (Built-In)
Features: C.O.B. LED, USB In/Out, Power Bank for Device Charging, Rubber Grip and Fold-Out Stand/Carrying Handle.



PRO SERIES TACTICAL



41-2701 USB Rechargeable Tactical Light

Lumens: 800 Mode 1 / 480 Mode 2 / 160 Mode 3 / 20 Mode 4

Run Time: 1 Hr 45 Min / 3 Hrs / 9 Hrs / 68 Hrs

Beam Distance: 285 Meters / 200 Meters / 132 Meters / 46 Meters

Peak Beam Intensity: 20280cd / 10000cd / 4360cd / 532cd

IPX8

Battery: 18650 Li-ion Battery (Included)

Drop Test: 2 Meters

Features: Light touch switch access to adjust brightness, ON/OFF Tail Cap Switch. Type III Hard Anodized Aluminum, Battery Level Indicator, Mode Switch, Stainless Steel Bezel, Micro USB Charging Port.



41-2702 Tactical Flashlight

Lumens: 840 High / 48 Low

Run Time: 1 Hr 30 Min High / 16 Hrs Low

Beam Distance: 236 Meters High / 59 Meters Low

Peak Beam Intensity: 13920cd High / 880cd Low

IPX7

Battery: 2 CR123 3V Batteries (Included)

Drop Test: 2 Meters

Features: On/Off Tail Cap Switch, CREE LED, Metal Clip, Type III Hard Anodized 6061-T6 Aircraft Aluminum.



41-4299 USB Rechargeable Flashlight

Lumens: 800 High / 250 Low

Run Time: 1 Hrs 45 Min High / 6 Hrs 45 Min Low

Beam Distance: 365 Meters

Weather Resistant

Batteries: Li-ion Rechargeable

Features: USB Rechargeable, Aircraft grade anodized aluminum, includes DC Adapter.



41-4800 Power bank Rechargeable Flashlight

Lumens: 800 High / 250 Med / 60 Low

Run Time: 2 Hrs 45 Min High / 4 Hrs 30 Min Med / 13 Hrs Low

Beam Distance: 200 Meters High / 115 Meters Med / 60 Meters Low

Drop Test: 1.5 Meters

Weather Resistant

Battery: 2600 mAh Li-ion Rechargeable

Features: USB Rechargeable Power Bank, TIR Optics, Type III Hard Anodized Aluminum, High / Medium / Low Modes.



41-4805 Mini USB Rechargeable Flashlight

Lumens: 140 High / 60 Low

Run Time: 2 Hrs High / 4 Hrs 30 Min Low

Beam Distance: 110 Meters High / 70 Meters Low

Drop Test: 1 Meter

Weather Resistant

Batteries: 16340 mAh Li-ion Rechargeable

Features: USB Rechargeable, Zoom Focus, Strobe Setting.



41-4346 Wide Beam 1000 Lumen


Lumens: 650 Spot / 800 Wide / 1000 Wide+Spot
Run Time: 4 Hrs Spot / 2 Hrs 30 Min Wide / 2 Hrs Wide+Spot
Beam Distance: 200 Meters Spot / 35 Meters Wide /
145 Meters Wide+Spot
Weather Resistant
Batteries: 6 AA (Included)
Features: 220 Degree beam of light. Variable light output.

41-4345 Mini Wide Beam 450 Lumen

Lumens: 280 Spot / 340 Wide / 450 Wide+Spot
Run Time: 5 Hrs 30 Min Spot / 6 Hrs Wide / 3 Hrs Wide+Spot
Beam Distance: 148 Meters Spot / 25 Meters Wide /
143 Meters Wide+Spot
Weather Resistant
Batteries: 4 AAA (Included)
Features: 220 Degree beam of light. Variable light output.

CHECK OUT OUR WIDE BEAM VIDEO ON OUR WEBSITE:


www.Dorcy.com

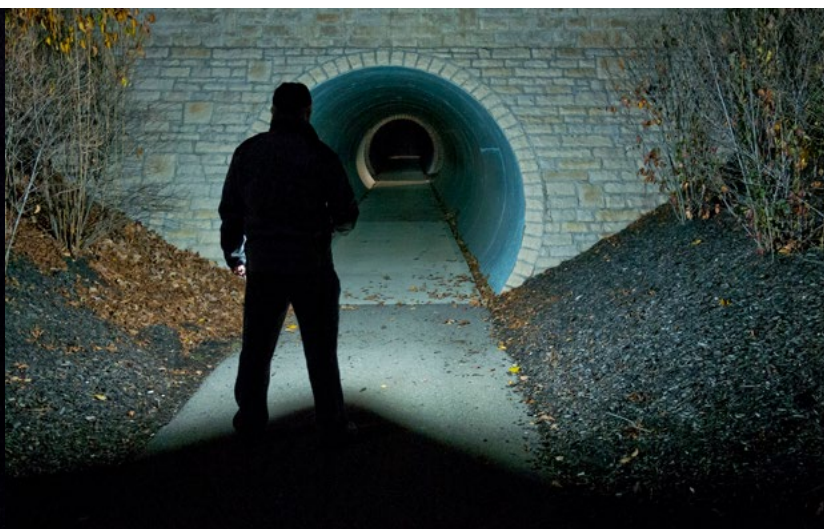



41-4297 Aluminum Slide Focus Flashlight

Lumens: 650
Run Time: 2 Hrs
Beam Distance: 164 Meters
Weather Resistant
Batteries: 3 AAA (Included)
Features: TrueSpot® Technology,
Built-in Battery Indicator, Multi-Battery
Feature, Tactical Switch or Push Button Switch.




41-4311 2AA Power Drive

Lumens: 500 High / 150 Low
Run Time: 3 Hrs 30 Min High / 15 Hrs 30 Min Low
Beam Distance: 123 Meters High / 79 Meters Low
Peak Beam Intensity: 3704cd High / 1540cd Low
Water Resistant IPX6
Batteries: 2AA (Included)
Features: Zoom Focus, Clip and Holster.



46-4400 Aluminum Flashlight

Lumens: 135
Run Time: 4 Hrs 30 Min
Weather Resistant
Batteries: 2 AAA (Included)
Features: Includes Holster, Pocket Clip,
Slide Focus Head.



Flex Battery System

Operates on

1x or **2x** or **3x**



41-4316 6AAA Power Drive

Lumens: 600 High / 200 Low
Run Time: 1 Hr High / 7 Hrs 30 Min Low
Beam Distance: 243 Meters High / 140 Meters Low
Peak Beam Intensity: 14720cd High / 4908cd Low
Water Resistant IPX6
Batteries: 6AAA (Included)
Features: Battery Level Indicator, Flex Battery System.



41-2602 Pro Series 9 LED Flashlight

Lumens: 42

Run Time: 15 Hrs

Beam Distance: 32 Meters

Drop Test: 2 Meters

Weather Resistant

Batteries: 3 AAA (Included)

Features: Nylon Lanyard, Shatterproof.



41-2392 Pro Series Swivel Head Work Light

Lumens: 280

Run Time: 1 Hr 30 Min

Beam Distance: 137 Meters

Weather Resistant

Batteries: 3 AAA (Included)

Features: Nylon Lanyard, Pivoting Head.



41-2600 Pro Series Unbreakable

Lumens: 265

Run Time: 1 Hr 45 Min


Beam Distance: 200

Drop Test: 10 Meters

Weather Resistant

Batteries: 3 AAA (Included)

Features: Nylon Glass Fiber Construction, Night Glow Switch, Can Surpass a 10 Meter Drop Test, Night Glow Powder Switch for Added Visibility.

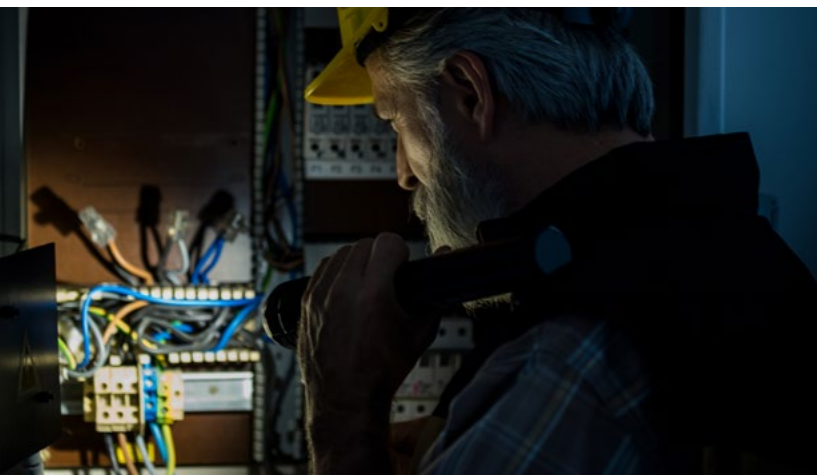

**41-2958 Rubber Light**

Lumens: 120
Run Time: 8 Hrs 30 Min
Beam Distance: 150 Meters
Weather Resistant
Batteries: 3 AAA (Included)
Features: TPE Rubber Material,
Non-Slip Grip, Nylon Lanyard.

**41-2968 Rubber Light**

Lumens: 180
Run Time: 11 Hrs
Beam Distance: 240 Meters
Weather Resistant
Batteries: 3 AA (Included)
Features: TPE Rubber Material,
Non-Slip Grip, Nylon Lanyard.

**41-4750 Cyber Light**

Lumens: 200
Run Time: 5 Hrs High
Beam Distance: 276 Meters
Water Resistant IPX4
Batteries: 4 AA (Included)
Features: TrueSpot® Reflector,
Non-Slip Grip, Nylon Lanyard.

**41-2521 Floating Flashlight**

Lumens: 200
Run Time: 17 Hrs
Beam Distance: 67 Meters
Weather Resistant
Batteries: 3 AA (Included)
Features: Waterproof/Floating, Built-in
Carabiner in Tail Cap, Non-Slip Grip.



41-2621 COB Pocket Work light

Lumens: 230

Run Time: 1 Hr 30 Min

Weather Resistant

Batteries: 3 AAA (Included)

Features: Chip on Board Technology, Tough ABS Construction, Magnetic swivel for multi-directional use, Rubber spray finish.



41-2620 COB Magnetic Work light

Lumens: 200

Run Time: 1 Hr 30 Min

Weather Resistant

Batteries: 3 AAA (Included)

Features: Chip on Board Technology, Magnet base.



41-4320 High CRI + UV Headlight

Lumens: 470 High / 135 Med / 50 CRI

Run Time: 6 Hrs High / 13 Hrs Med / 20 Hrs CRI

Beam Distance: 100 Meters

Weather Resistant

Batteries: 3 AAA (Included)

Features: Motion Activated, Pivoting Head, Padded Rear Battery Pack, UV Mode, 80 CRI Rating





41-2104 Motion Activated Headlight

Lumens: 200
Run Time: 4 Hrs 30 Min
Beam Distance: 76 Meters
Weather Resistant
Batteries: 3 AAA (Included)
Features: Motion Activated, Pivoting Head, Padded Rear Battery Pack.



41-4335 ULTRA HD Headlight with UV LED

Lumens: 530 High
Run Time: 2 Hrs
Beam Distance: 105 Meters High
Drop Test: 1 Meter
Weather Resistant
Batteries: 3 AAA (Included)
Features: Aircraft Grade Aluminum, Swivel Head, COB, Press and Hold Power Button for UV Light Feature, Spot & COB Flood Modes.



41-4319 Power Drive Headlight

Lumens: 450 High / 150 Med / 25 Low
Run Time: 1 Hr High / 5 Hrs Med / 26 Hrs Low
Beam Distance: 180 Meters High
Water Resistant IP66
Batteries: 2 AA (Included)
Features: 4 Hard Hat Clips, Hi / Medium / Low.



41-2606 Industrial Headlight

Lumens: 280 High / 37 Low
Run Time: 4 Hrs / 14 Hrs 45 Min Low
Beam Distance: 103 Meters
Weather Resistant
Batteries: 3 AAA (Included)
Features: 3 LEDs, Wide Area Beam.



41-1080 LED Rechargeable Spotlight

Lumens: 1000

Run Time: 3 Hrs

Beam Distance: 325 Meters

Weather Resistant

Batteries: 6 Volt Rechargeable

Features: Includes AC/DC adapters, proportioned design stands on its own.



41-4296 4C LED Spotlight

Lumens: 500

Run Time: 5 Hrs 30 Min

Beam Distance: 587 Meters

Weather Resistant

Batteries: 4 C (Included)

Features: Pivoting Head, Flat Base for Standing.



41-1035 LED Industrial Rechargeable Lantern

Lumens: 300

Run Time: 4 Hrs 30 Min

Beam Distance: 30 Meters

Weather Resistant

Drop Test: 3 Meters

Batteries: 6 Volt Lead Acid

Features: Built in Battery Indicator, AC Charging Adapter included.



41-2523 Floating Lantern

Lumens: 330

Beam Distance: 240 Meters

Weather Resistant

Batteries: 6 AA (Included)

Features: Floating / Waterproof, rugged design.



41-1482 Safety Signal Wand Flashlight

Lumens: 30

Weather Resistant

Batteries: 2 D (Included)

Features: Multifunctional - Signal Wand and Traditional Flashlight, 24hr+ Runtime, Durable High Impact Shell.

These signal wands are extremely durable, made of heavy-duty plastic construction allowing them to be weather resistant. Each wand has an easy to use side mounted sealed push button switch and comes with a convenient nylon wrist lanyard.




41-1060
9" 4 LED, 2D Signal Wand



41-1061
12" 5 LED, 2D Signal Wand



41-1063
12" 10 LED, 3C Signal Wand w/ Flashlight

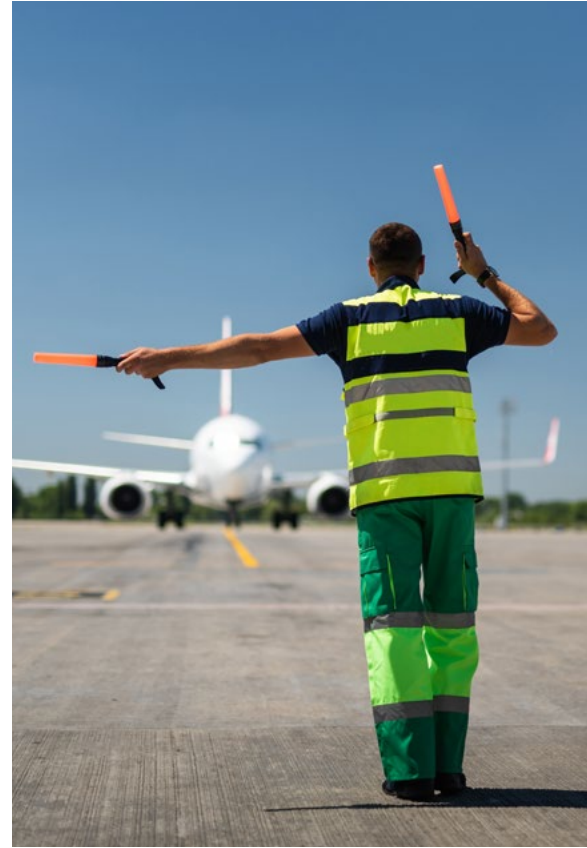

The 2D Deluxe Safety Cone Flashlight contains a LED bulb providing a super bright beam of light, making it a perfect multipurpose flashlight.



**CONTACT YOUR REPRESENTATIVE FOR THE FULL LINE OF ALKALINE AND SPECIALTY
DIEHARD BATTERIES.**

High Performance alkaline products. 5 Cell types available, AA, AAA, 9V, C and D. Products meet all ANSI/IEC specifications. Available in bulk pack with black and white display cartons.



SIZE	PART #	DISPLAY PACK	MASTER CARTON
AA	41-1850	24	288
AAA	41-1851	24	288
D	41-1852	12	72
C	41-1853	12	72
9V	41-1854	12	72

DORCY®

**DORCY INTERNATIONAL
2700 PORT RD
COLUMBUS, OH 43217
TEL: 800.837.8558
FAX: 614.497.5822**

WWW.DORCY.COM