


DU-5K-IS

DATE	CHANGES	INTL	REV
12.12.11	Original	TH	1.0

Hazardous (Classified) Location

Non Hazardous (Unclassified) Location

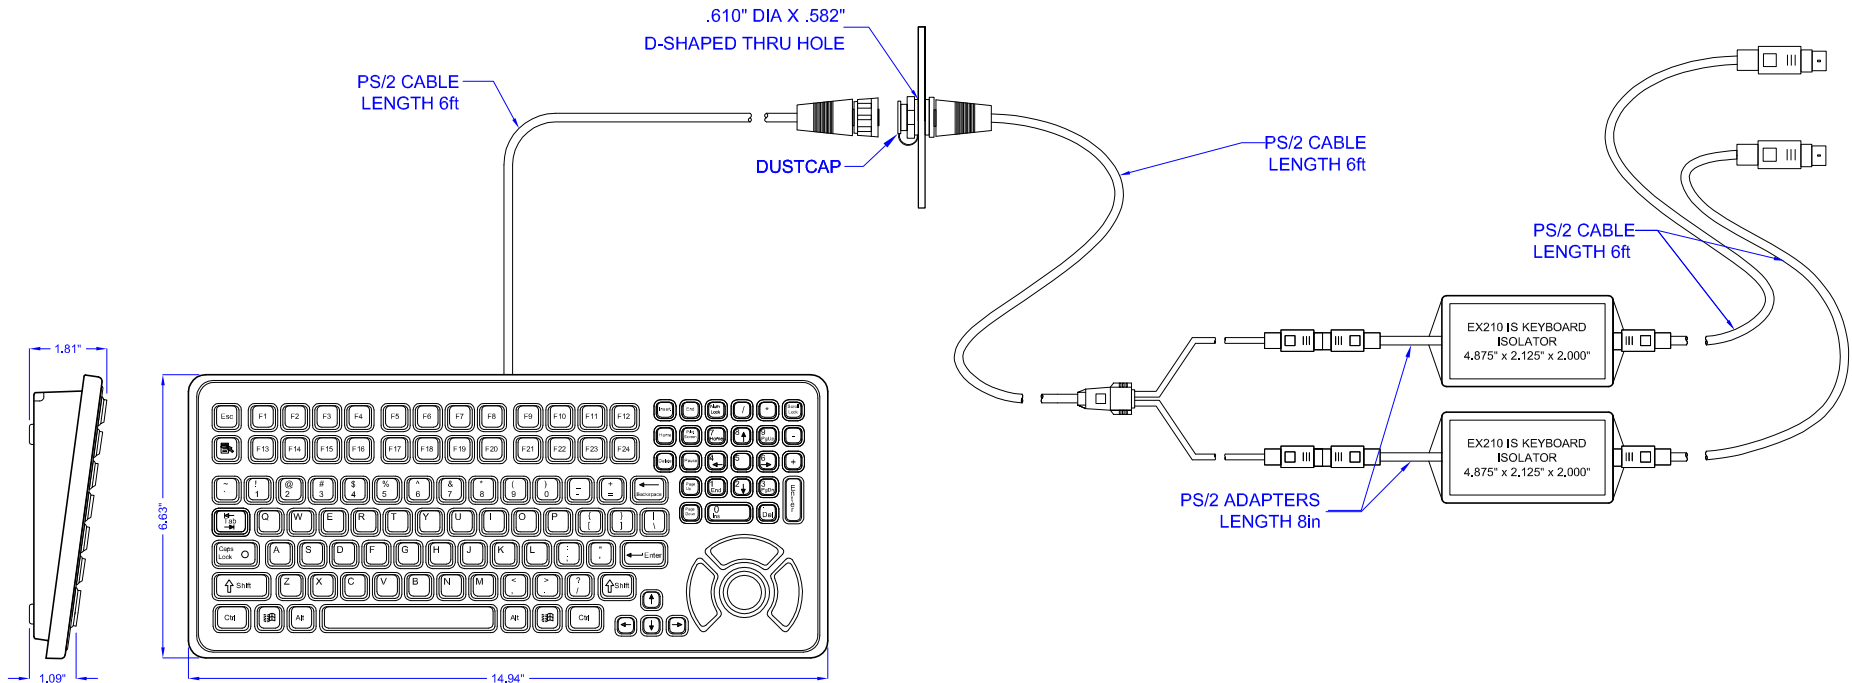

KEYBOARD SPECIFICATIONS:

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

Reference Drawing Number HL0003 for Power Requirements
 Installation shall be in accordance with NEC, Article 504,
 ANSI, NFPA 70

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

3.8 lbs +/- 0.10 lbs (1.7 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

NOT TO SCALE



iKey, Ltd.
 2621 Ridgepoint Dr, Suite 235
 Austin, Texas 78754

©2011 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: DU-5K-IS
 Drawing Title: DU-5K-IS-MKT

Drawing Number: MKT0292
 Revision: 1.0

Sheet: 1 OF 1
 Date: 12.12.11
 TWH