


# PM-2000-IS

DATE	CHANGES	INTL	REV
12.12.11	Original	TH	1.0

## Hazardous (Classified) Location

## Non Hazardous (Unclassified) Location

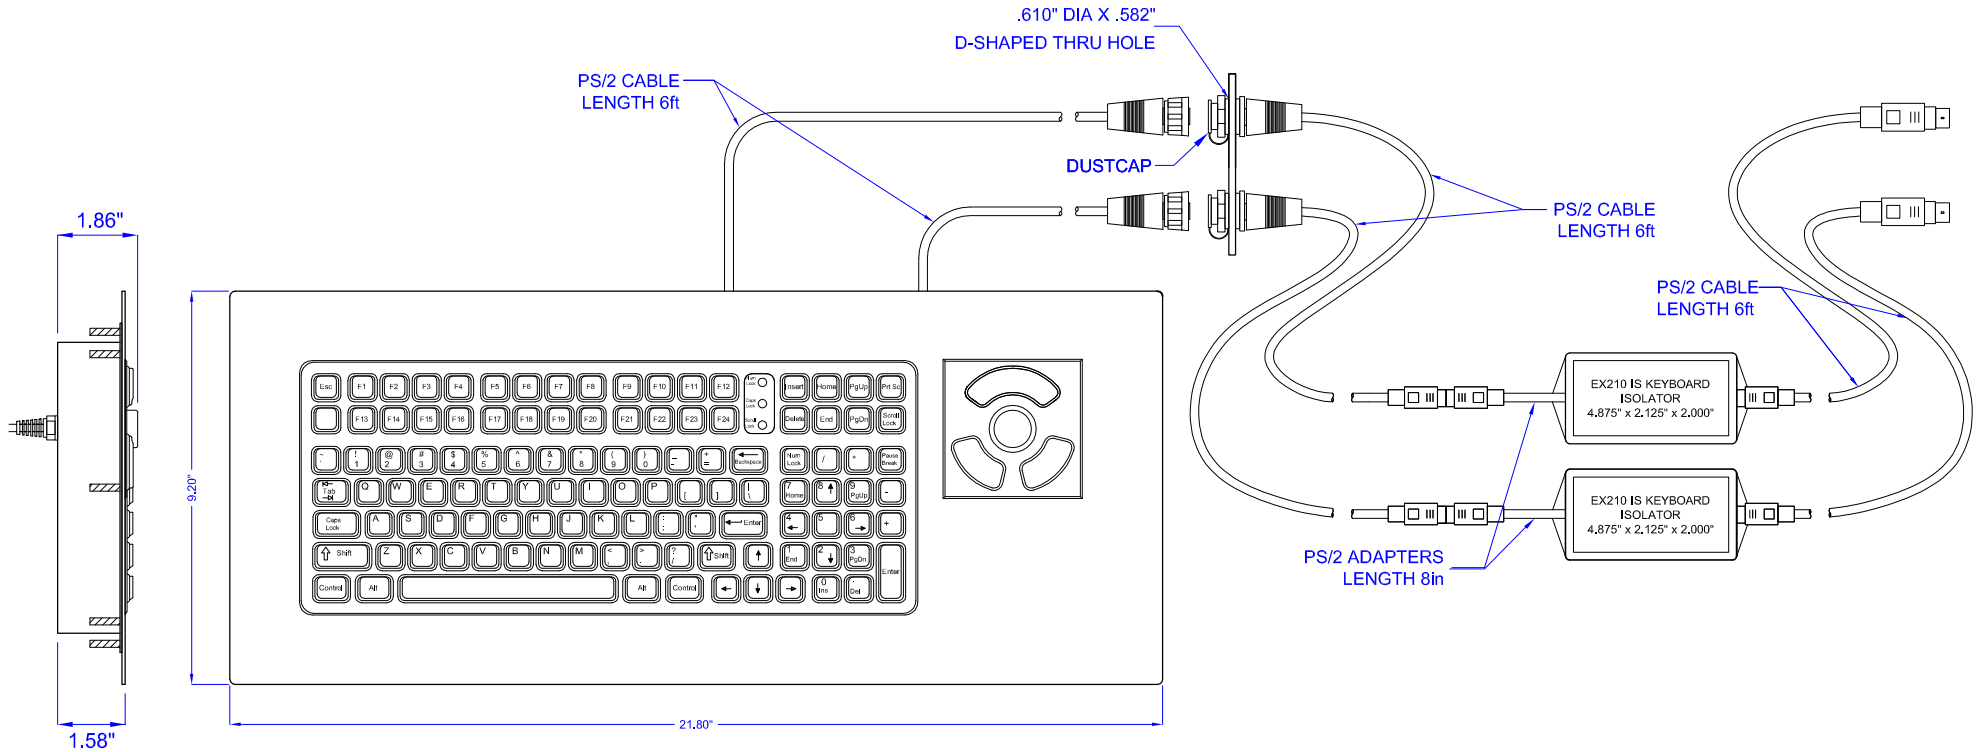

### KEYBOARD SPECIFICATIONS:

#### KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

#### POWER

Reference Drawing Number HL0003 for Power Requirements  
 Installation shall be in accordance with NEC, Article 504,  
 ANSI, NFPA 70

#### TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

#### HUMIDITY

100% Humidity Resistant

#### VIBRATION

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

#### SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

#### WEIGHT

6.0 lbs +/- 2.72 lbs (1.7 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

NOT TO SCALE



iKey, Ltd.  
 2621 Ridgpoint Dr, Suite 235  
 Austin, Texas 78754

©2011 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: PM-2000-IS

Drawing Title: PM-2000-IS-MKT

Drawing Number: MKT0294

Revision: 1.0

Sheet: 1 OF 1

Date: 12.12.11

TWH