



- **Standard Analogue/SIP phone with door**
- **Vandal resistant handset and cord**
- **Hotline,without Keypad**
- **Standard IP 66 weatherproof rating**
- **Phone line powered (Analogue)**
- **POE or DC12V powered (SIP)**
- **RJ45 port for SIP connection**
- **on wall mounting with mounting bar**
- **II 2G Ex e ib [ib] mb IIC T6Gb**
- **III 2D Ex ib [ib] tb IIIC T80Db**
- **Zone 1& Zone 2**
- **ATEX,CE,FCC,Rosh compliant**

The Explosion Proof Telephone is designed for voice communication in the hostile environment where reliability, efficiency and safety are of prime importance. The telephone can handle the large temperature differences found outdoors, high humidity, exposure to sea water and dust, Corrosive atmosphere, Explosive gases & particles, as well as mechanical wear and tear, making it perfect for use as an emergency telephone. The unique robust handset is manufactured from moulded Bulk Molding Compound and designed specifically to withstand arduous use in all environments, armoured cord to provide additional resistance to vandalism or heavy industrial use.

The Explosion-proof and Weatherproof Telephones are designed for use by the chemical plant, Coal Mine, power stations, the armed services and heavy industry which require very reliable and explosion protection telephony under adverse conditions.

SIP-VoIP TECHNICAL SPECIFICATIONS

Power:

12V DC or PoE: IEEE802.3af/at

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control feature: Flexible dial map, support hot-line

Network Features

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config
- Data Protocols: IPv4, TCP, UDP, ICMP, ARP, DNS and DNS SRV for SIP Signaling

Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

ANALOGUE

Dialing

MF (tone)

Power supply

Drawn from telephone line

Lightning / Transients

Protection to ITU-T k.21 enhanced levels

Programming

Can be programmed remotely by DTMF tone or use keypad

TECHNICAL SPECIFICATIONS

Casing Material

Die cast aluminium, epoxy powder coated.

Colors

Available in four colors:

Orange, Yellow, Red and Blue

Handset Material

Cyclopol with stainless steel spiral cord

Hook switch

Electronic / magnetic with no visible moving parts

Keypad

No Keypad

Temperature

T4

Weather Resistance

IP66(standard)~ IP67(highest rating)

Ringing Tone



Shrill warble tone 80 dBA @ 1 metre typical (Analog)

Shrill warble tone 90 dBA @ 1 metre typical (SIP)

M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

DIMENSIONS:

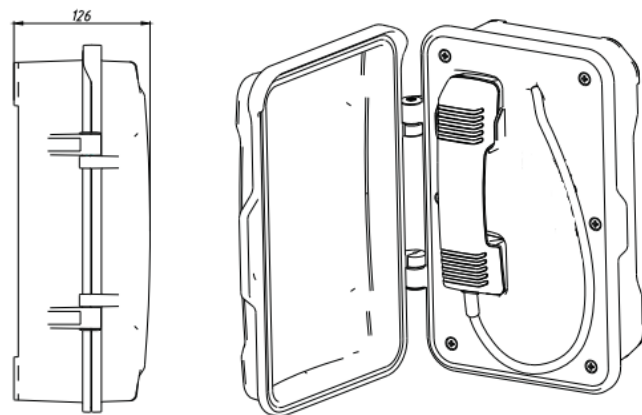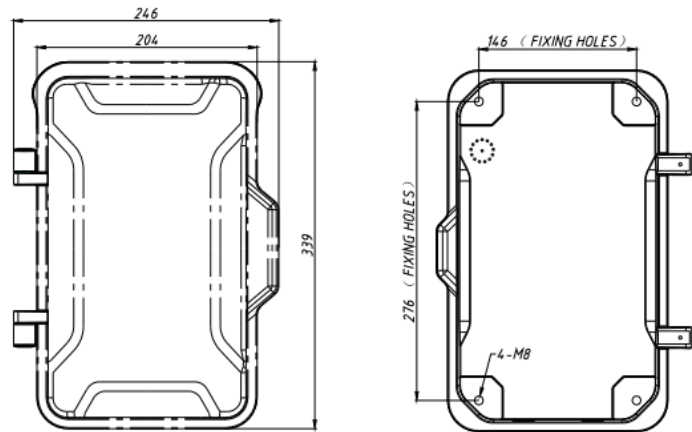

(Measured in mm)

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B



This mark indicates compliance with the:
II 2G Ex e ib mb IIC T4 Gb
II 2D Ex ib [ib] tb IIIC T135 °Db

PACKAGE

unit size: 246 *339 *126 (mm)

Carton size:200*300*440 (mm)

Packaging materials: pearl cotton, carton

Gross weight: 9KG

Net weight: 8KG